

TCMC

雙連式固定容量輪葉泵浦

FIXED DISPLACEMENT TWIN VANE PUMPS 150FF/TT SERIES



特點：

- 共用同一心軸及馬達，節省空間。
- 阻抗低之吸入入口，運轉滑順，溫定性高，嘈音小。
- 備有正逆轉及軸徑22mm供客戶選擇(一般軸徑為19mm)。

FEATURES:

- Employed same shaft & motor, occupied little space.
- Designed of suction orifice for low suction resistance running smoothly, hi-stability & low noise level.
- Equipped with forward-reverse rotating and 22 mm shaft dia, etc., for customer to select (In general, shaft dia 19mm).

訂購索引

ORDERING INDEX

150 FF/TT - ※ - ※ - ※ ※ ※ - 02

設計號碼 Design no.

吐出部位 Discharge portion(正視泵浦軸端View from shaft end)
R:右邊 Right hand L:左邊 Left hand (規格品 Normal)

迴轉方向 Rotating direction(正視泵浦軸端 View from shaft end)
R:正轉CW L:逆轉CCW

安裝方式 Mounting style
F:Flange mounting(法蘭式)
L:Lug mounting(腳座式)

吐出能力 Delivery capacity(蓋端 Cover end)
150T:48, 61, 75, 94, 116, 125(c.c/rev.)

吐出能力 Delivery capacity(軸端 Shaft end)
150T:48, 61, 75, 94, 116, 125(c.c/rev.)

接續方式 Connecting type
T:Piping type(接管式)
F:Flange type(出入口法蘭型)

系列號碼 Serial no.


規格

SPECIFICATIONS

型式 Model	吐出能力 Delivery capacity				最大壓力 Max. pressure (kgf/cm²)	額定速度 Rated speed	
	迴轉速度(rpm) Running speed					最高 Max.	最低 Min.
	1000	1200	1500	1800			
150T-48	48.3	57.9	72.4	86.9	70	1800	900
150T-61	61.5	73.8	92.2	110.7	70	1800	
150T-75	75.5	90.6	113.2	135.9	70	1500	
150T-94	94.2	113.0	141.3	—	70	1500	
150T-116	116.3	139.6	—	—	70	1200	
150T-125	125.3	150.4	—	—	70	1200	
150T-48	48.3	57.9	72.4	86.9	70	1800	
150T-61	61.5	73.8	92.2	110.7	70	1800	
150T-75	75.5	90.6	113.2	135.9	70	1500	
150T-94	94.2	113.0	141.3	—	70	1500	
150T-116	116.3	139.6	174	—	70	1200	
150T-125	125.3	150.4	—	—	70	1200	

■ 尺寸圖 DIMENSIONS

150F + 150F 法蘭式 Flange Type

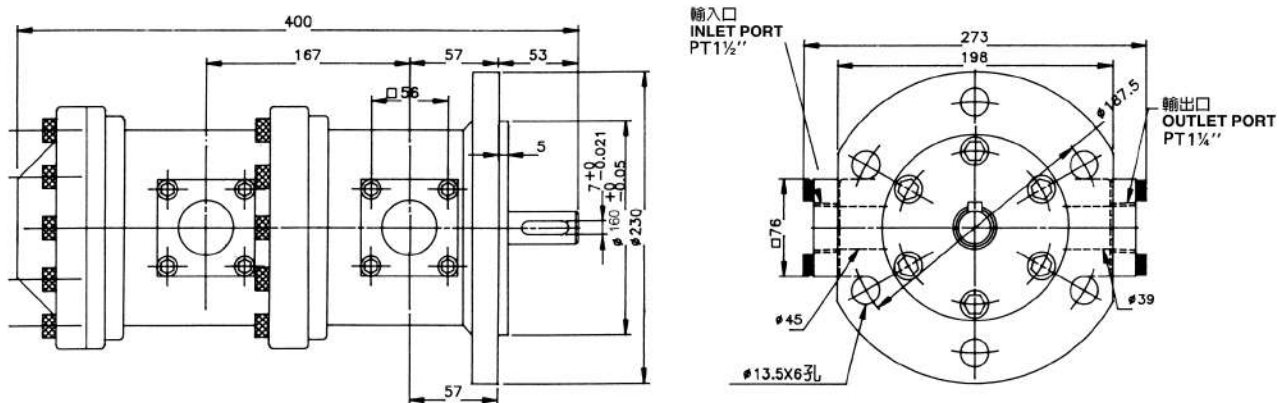

150F + 150F 腳座式 Lug Type

