


TCMC

雙連式可變容量輪葉泵浦

VARI-DISPLACEMENT TWIN VANE PUMPS
TCVVP-F1212, F1515, F2020

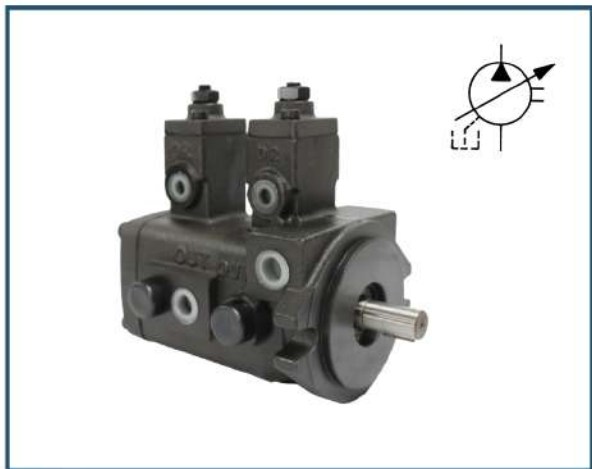

特點：

- 本系列泵浦，操作時嘈音小，運轉滑順耐磨耗，適用於工作母機及專用機使用。
- 溫昇小，馬力損失小，內藏式自動壓力補償設計。

FEATURES:

- This series pump which being with low noise level, running smoothly and wear resistant, Especially, those are very suitable for machine tool & specialpurpose m/c use.
- Little temp upward & little power lose and designed of auto emersed pressure compensating.

訂購索引

ORDERING INDEX

TCVVP	-	F	※	※	-	A	※	-	A	※	-	02	
													設計號碼 Design no.
													壓力範圍 Pressure range(蓋端 Cover end)
													1:5~18 bar, 2:15~35 bar
													3:30~55 bar, 4:50~70 bar
													壓力範圍 Pressure range(軸端 Shaft end)
													1:5~18 bar, 2:15~35 bar
													3:30~55 bar, 4:50~70 bar
													吐出能力 Delivery capacity(蓋端 Cover end)
													1:8(23)L/min, 2:12(26)L/min, 3:15(30)L/min, 4:20(40)L/min
													吐出能力 Delivery capacity(軸端 Shaft end)
													1:8(23)L/min, 2:12(26)L/min, 3:15(30)L/min, 4:20(40)L/min
													安裝方式 Mounting style
													F:Flange mounting(法蘭式)
													系列號碼 Serial no.

規格

SPECIFICATIONS

型式 Model	吐出能力 Delivery capacity (1800 rpm)		壓力調整範圍 Pressure adj. range	額定速度 Rated speed	
	前泵 Front pump	後泵 Rear pump		最高 Max.	最低 Min.
TCVVP-F1212	12 l/min	12 l/min	5~18 bar	1800 rpm	800 rpm
TCVVP-F1515	15 l/min	15 l/min	15~35 bar		
TCVVP-F2020	20 l/min	20 l/min	30~55 bar 50~70 bar		

■ 尺寸圖 DIMENSIONS

TCVVP-F1212, F1515, F2020

